


Bearings are magnetic Distances in metres Elevation in ft AMSL Coordinates WGS 84	TWR 118.100	AD ELEV 697	PERUGIA /S. FRANCESCO	
		APRON ELEV 674		


RWY	QFU	THR	bearing strength
01	013°	N 43°05'18.64" E 012°30'38.31"	PCN 88/F/A/X/T
19	193°	N 43°06'27.66" E 012°31'02.38"	


REMARKS:  
 (\*1) CAUTION  
 PAPI RWY 19 usable only by day;  
 MEHT 34m due to obstacle clearance;  
 Due to high terrain and OBST, caution  
 shall be exercised while descending on  
 base leg to intercept and follow PAPI  
 SLOPE  
 (\*2) TWY A restricted to wingspan up to  
 36m

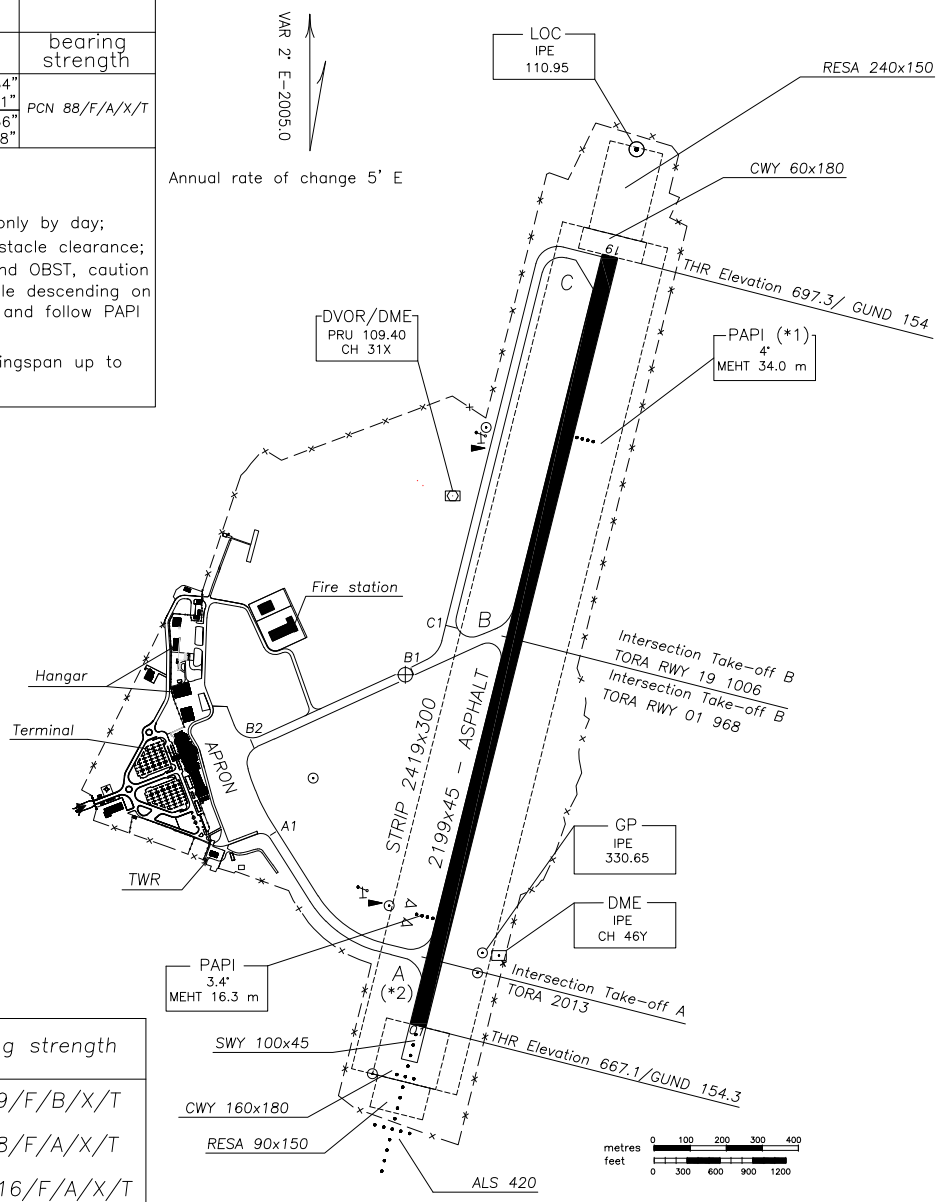

TWY IDENT	WIDTH	bearing strength
A	18	PCN 69/F/B/X/T
B	23	PCN 98/F/A/X/T
C	23	PCN 116/F/A/X/T

CHANGE: UPDATED CHART

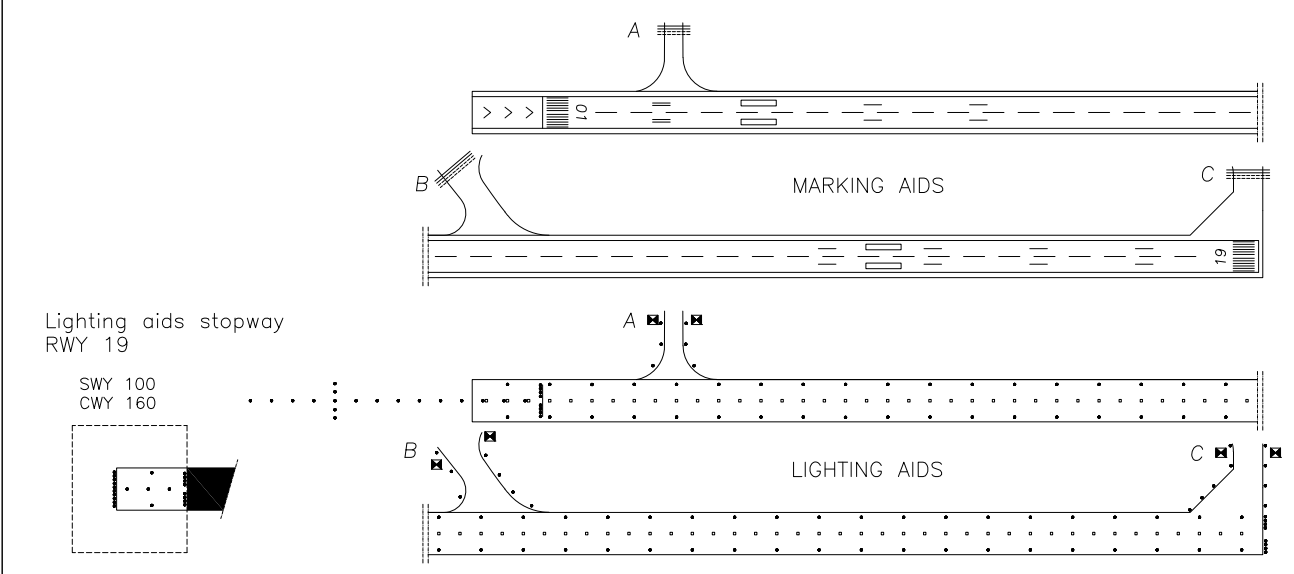

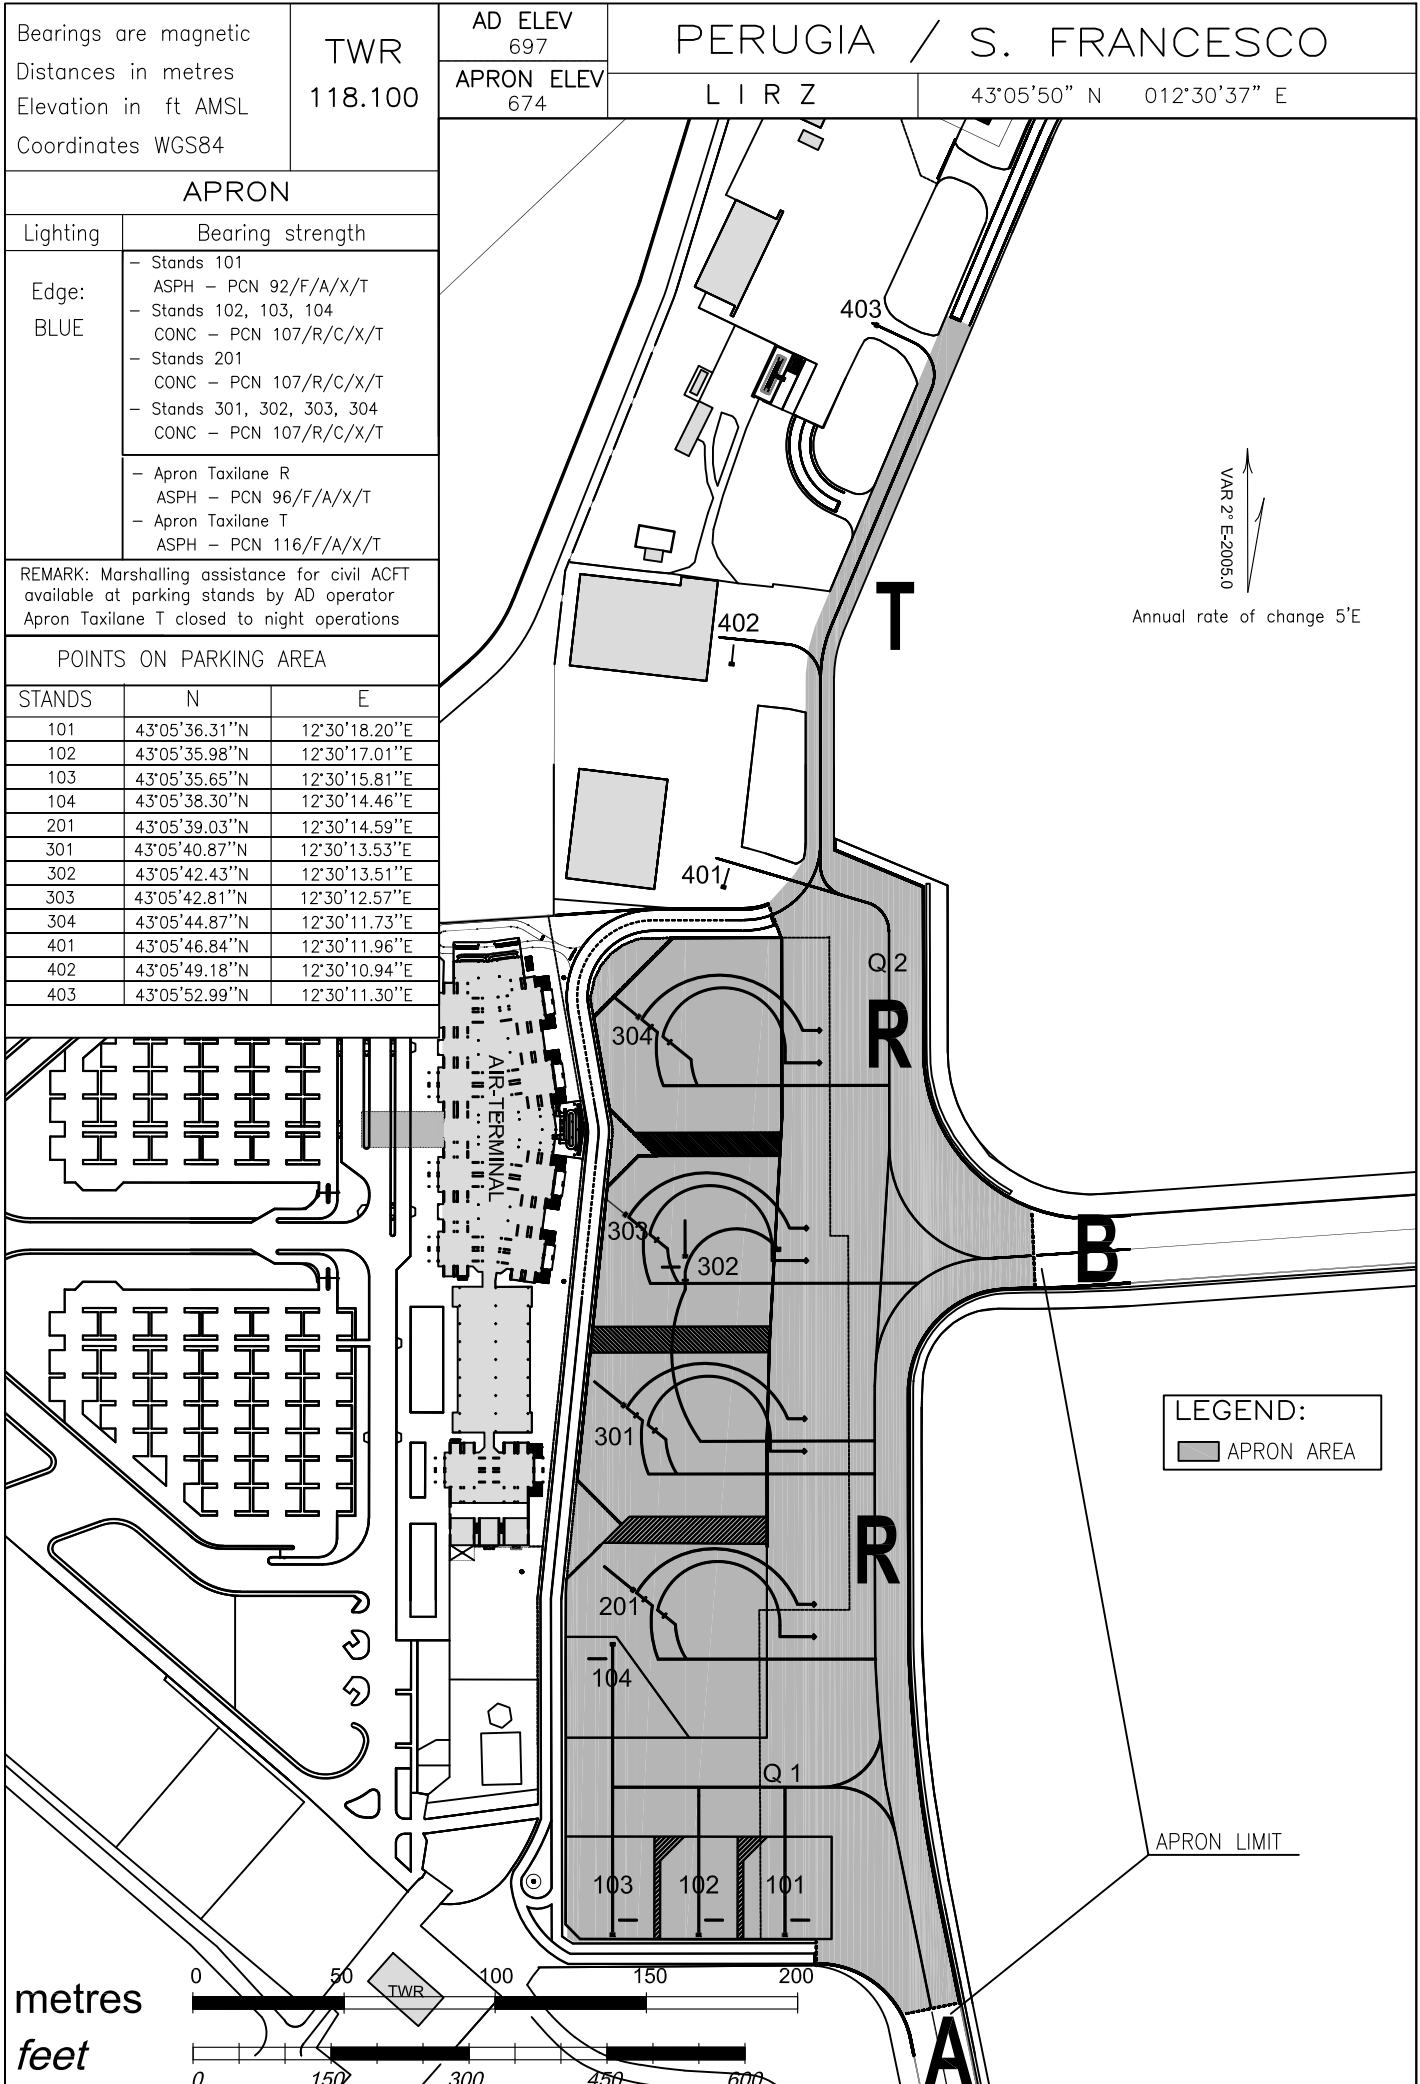

Bearings are magnetic  
 Distances in metres  
 Elevation in ft AMSL  
 Coordinates WGS84

TWR  
 118.100

AD ELEV  
 697

APRON ELEV  
 674

PERUGIA / S. FRANCESCO

L I R Z

43°05'50" N 012°30'37" E

APRON

Lighting Bearing strength

Edge: BLUE

- Stands 101 ASPH - PCN 92/F/A/X/T
- Stands 102, 103, 104 CONC - PCN 107/R/C/X/T
- Stands 201 CONC - PCN 107/R/C/X/T
- Stands 301, 302, 303, 304 CONC - PCN 107/R/C/X/T
- Apron Taxilane R ASPH - PCN 96/F/A/X/T
- Apron Taxilane T ASPH - PCN 116/F/A/X/T

REMARK: Marshalling assistance for civil ACFT available at parking stands by AD operator  
 Apron Taxilane T closed to night operations

POINTS ON PARKING AREA

STANDS	N	E
101	43°05'36.31"N	12°30'18.20"E
102	43°05'35.98"N	12°30'17.01"E
103	43°05'35.65"N	12°30'15.81"E
104	43°05'38.30"N	12°30'14.46"E
201	43°05'39.03"N	12°30'14.59"E
301	43°05'40.87"N	12°30'13.53"E
302	43°05'42.43"N	12°30'13.51"E
303	43°05'42.81"N	12°30'12.57"E
304	43°05'44.87"N	12°30'11.73"E
401	43°05'46.84"N	12°30'11.96"E
402	43°05'49.18"N	12°30'10.94"E
403	43°05'52.99"N	12°30'11.30"E

CHANGE: Updated chart

